

FICHE TECHNIQUE
DATA SHEET

ParKolor 60DW



Starway

starway.eu



marque française

ParKolor 60DW



LED COB 150W Blanc variable
2 700°K à 6 500°K

Flux lumineux : 2 300 lumens

Lux@5m : 1 900 lux@10°

Zoom : 10° – 58.5°

Dimmer : 16 bits

4 courbes de gradation

Refroidissement : convection naturelle

DMX, RDM

Consommation max : 110W

Connecteurs :

Seetronic True one in/out et XLR 5
IP65

LED COB 150W Variable white
2,700°K to 6,500°K

Luminous flux: 2,300 lumens

Illuminance @5m: 1,900 lux@10°

Zoom: 10° - 58.5

Dimmer: 16 bits

4 dimming curves

Cooling: natural convection

DMX, RDM

Max. power consumption: 110W

Connectors:


Seetronic True one in/out and XLR 5
IP65 RATING

REF :
225462



Accessoires
Accessories

Volet et porte-filtre
Shutter and filter holder
(REF : 225463)

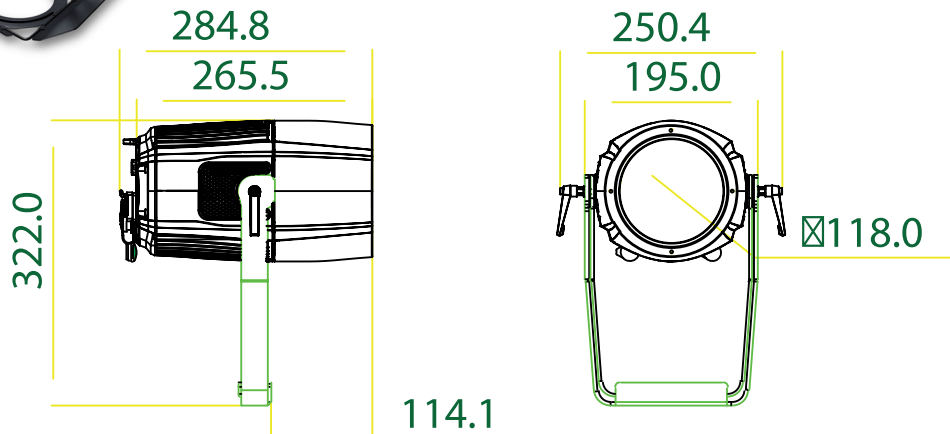

SOURCE

| | |
|-------------------------------|----------------------|
| LED | 150W CW + WW COB LED |
| Flux lumineux / Luminous Flux | 2 300 lumens |
| Eclairage / Light output | 1 900 Lux@5m (10°) |

OPTIQUE / OPTICAL

| | |
|-----------------------------------|-------------|
| Angle d'ouverture / Opening angle | 10° – 58.5° |
|-----------------------------------|-------------|

EFFETS / EFFECTS

| | |
|--------|---|
| Dimmer | 16-bits / 4 courbes de gradation 16 bits / 4 dimmer curves |
|--------|---|

CONTRÔLE / CONTROL

| | |
|------------------------|-------------------------------|
| DMX Canaux / Channels | 1/2/3-CCT/4/4-CCT/5/6/6-CCT/9 |
| Mode | DMX512 |
| DMX Connexion | XLR 5 in/out |
| Protocoles / Protocols | RDM, DMX |

BOITIER / HOUSING

| | |
|--------------------------------------|--------------------|
| IP | 65 |
| Dimensions (l x p x h) / (l x d x h) | 284 x 257 x 293 mm |
| Poids | 4,2 Kg |

PUISSANCE / POWER

| | |
|----------------------------|-------|
| Consommation / Consumption | 110 W |
|----------------------------|-------|